

FIG. 9




FIG. 10

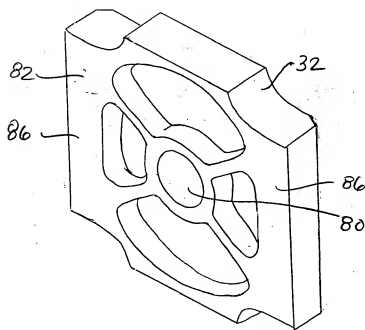


FIG. 11

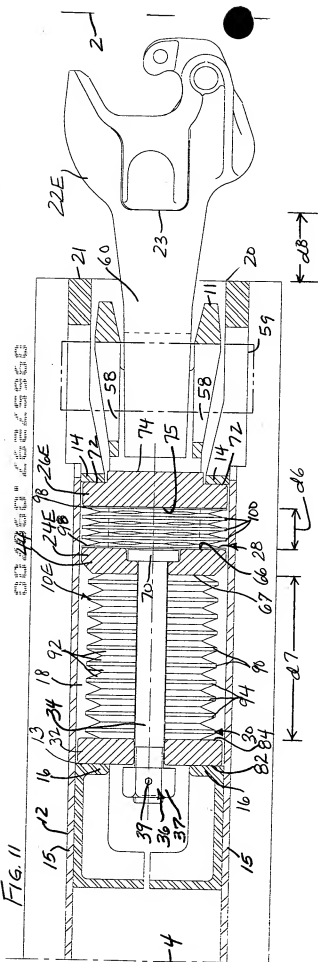


FIG. 12

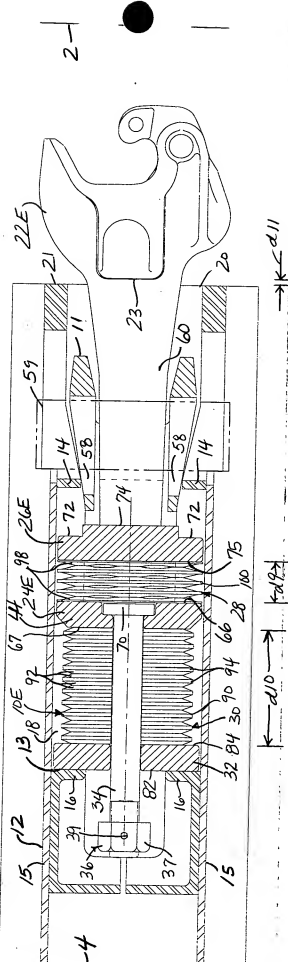


FIG. 13

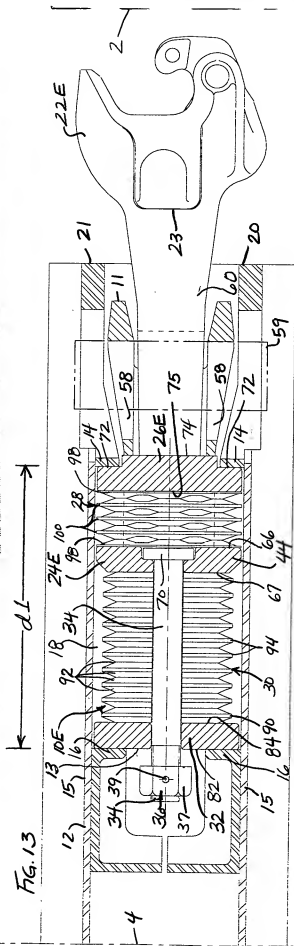


FIG. 14

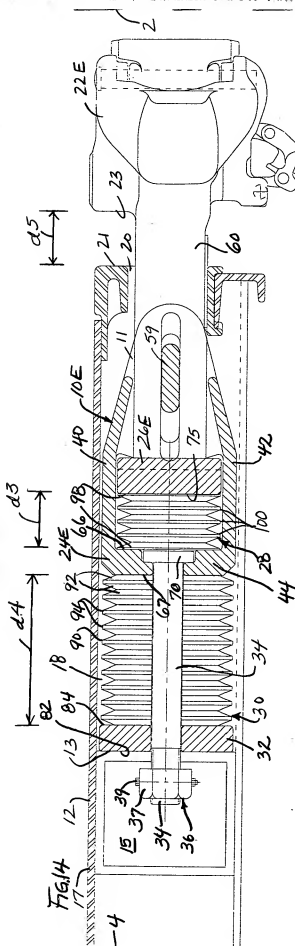


Fig. 15


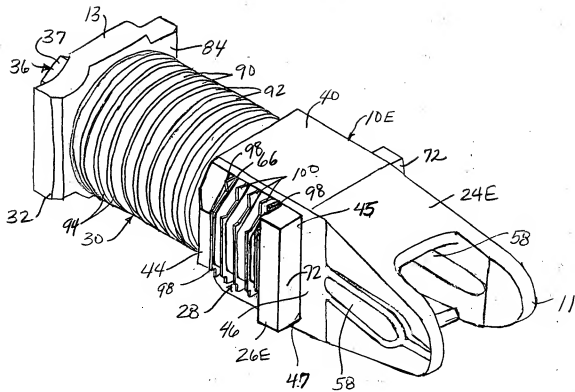


Fig. 16

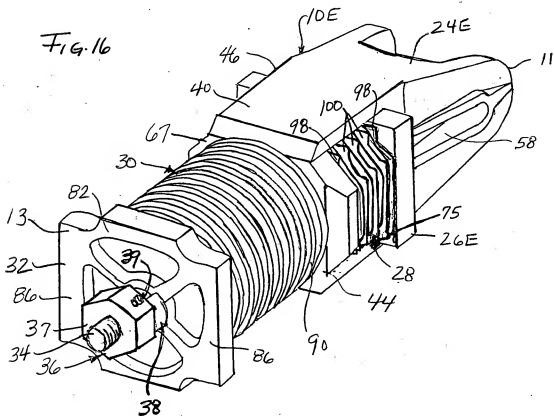

6667297-6667296

FIG. 17

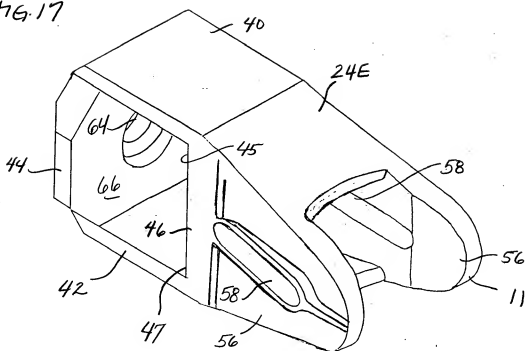
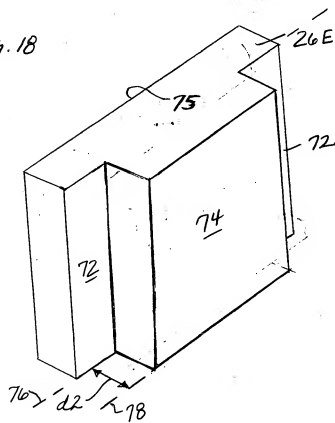


FIG. 18



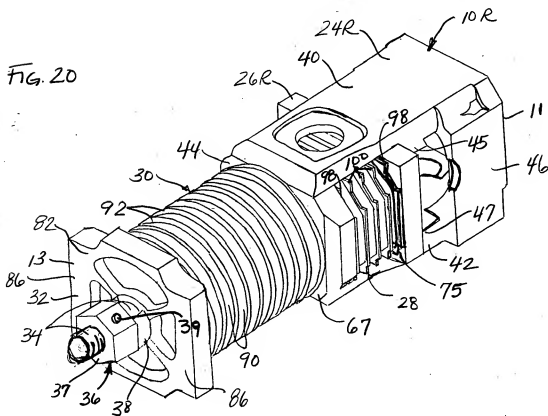


FIG. 21

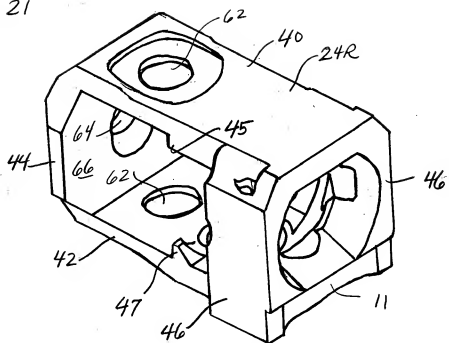


FIG. 22


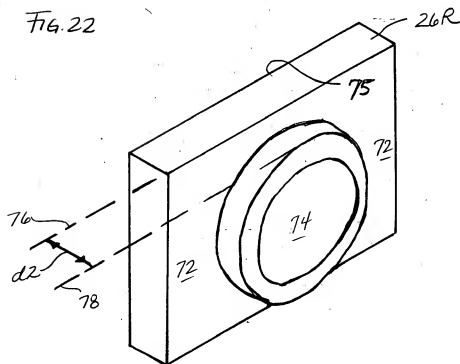


FIG. 23

STATIC CLOSURE / SPRING RATES

10XMI-244, installed height 13.375" &
4xMI-228, installed height 4.875"

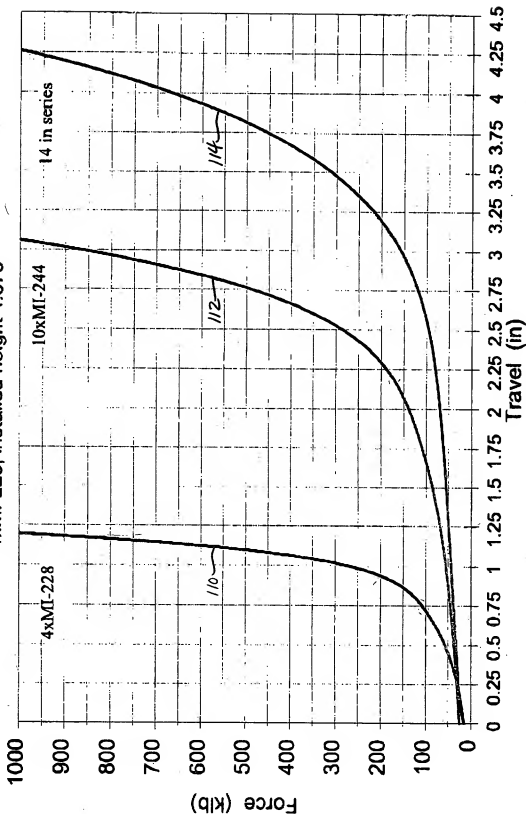

09657297 090700

802000-2622960


FIG. 24

DAMPING CHARACTERISTICS

SPEED(mph) 5.48

MAX FORCE (klbs)= 435.13

MAX TRAVEL (in)= 3.66

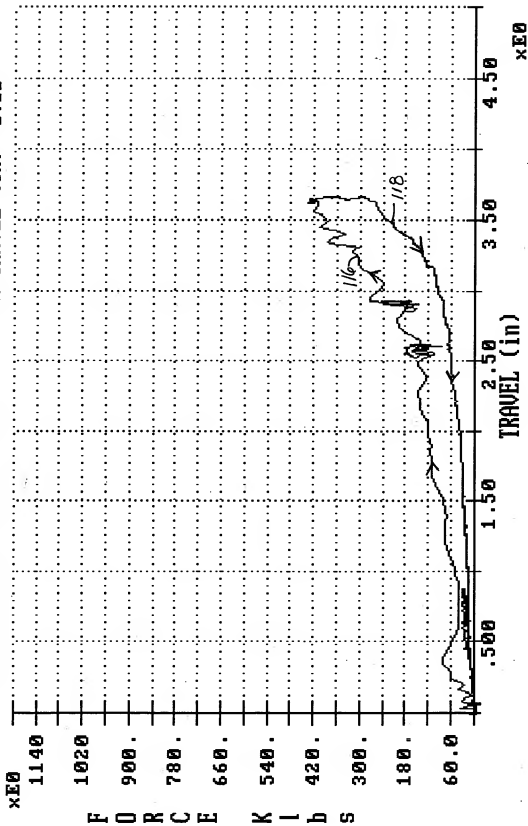

094060" 20225960


FIG 25

DAMPING & CHARACTERISTICS

SPEED(mph) 6.05

MAX FORCE (klbs)= 558.86

MAX TRAVEL (in)= 3.97

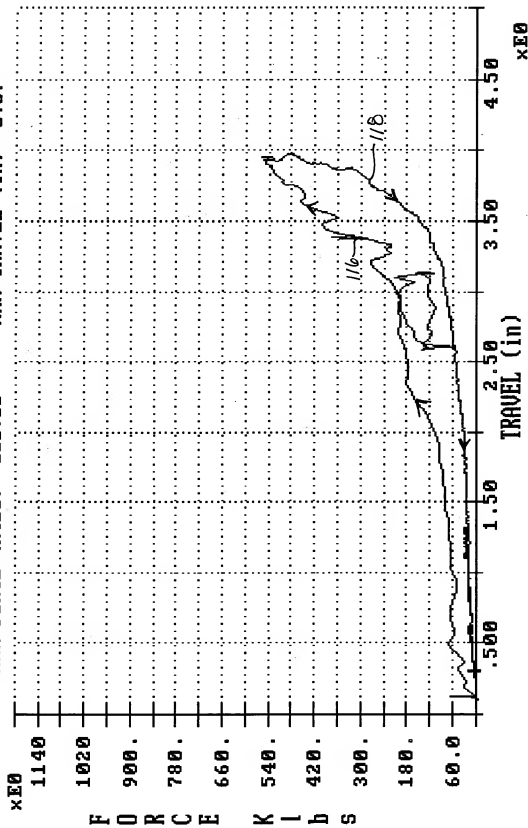


DD FORM 162-1500

FIG. 26

DAMPING CHARACTERISTIC

SPEED (mph) 6.52

MAX FORCE (k lbs) = 681.91 MAX TRAVEL (in) = 4.11

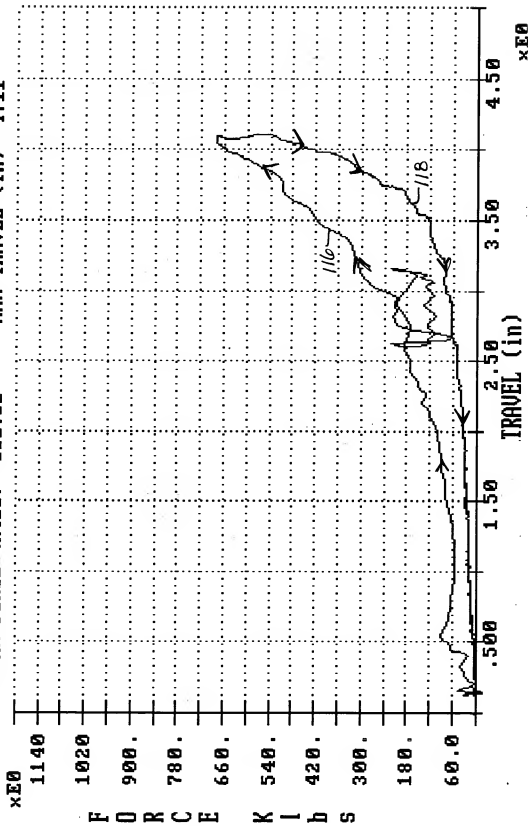

002000 26249960


FIG. 27

DAMPING CHARACTERISTICS

SPEED(mph) 7.16

MAX FORCE (klbs)= 889.58

MAX TRAVEL (in)= 4.22

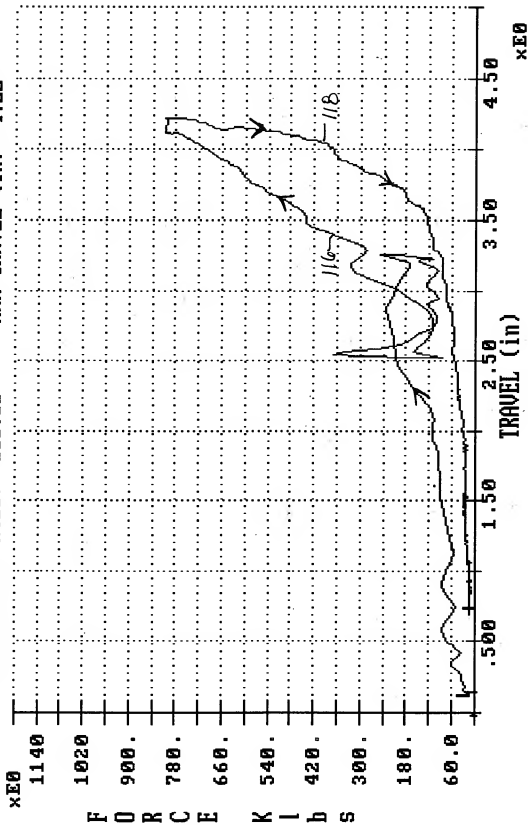

002060" 16215960

Fig. 28

DAMPING CHARACTERISTICS

SPEED(mph) 7.63

MAX FORCE (k lbs)= 914.25 MAX TRAVEL (in)= 4.33

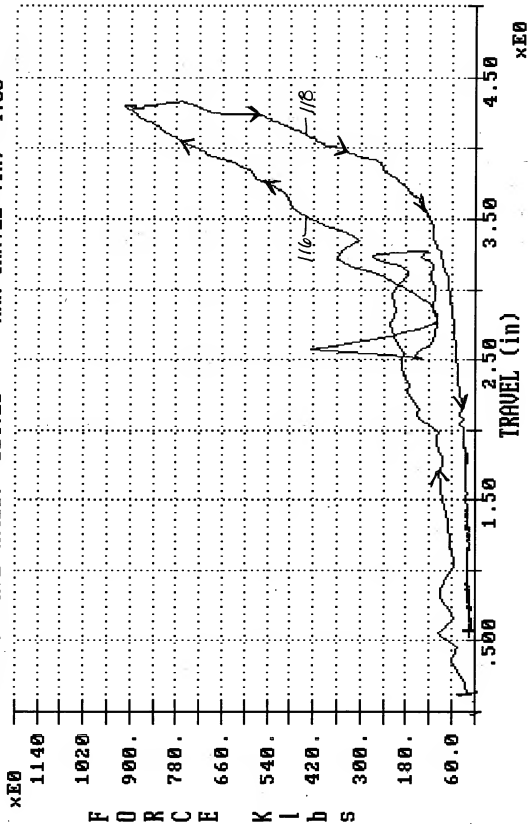


FIG. 29
DAMPING CHARACTERISTICS

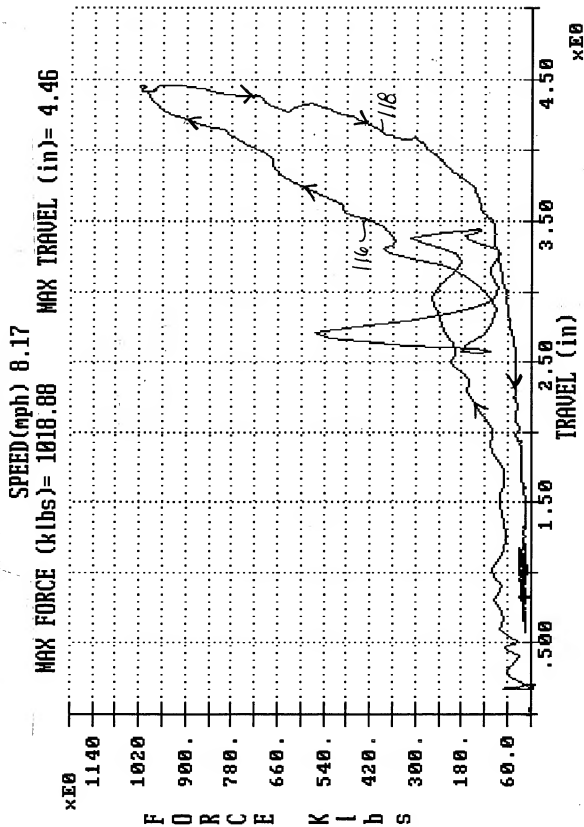


FIG. 30




FIG. 31




FIG. 32




FIG. 33




FIG. 34




FIG. 35




FIG. 36




FIG. 37

